
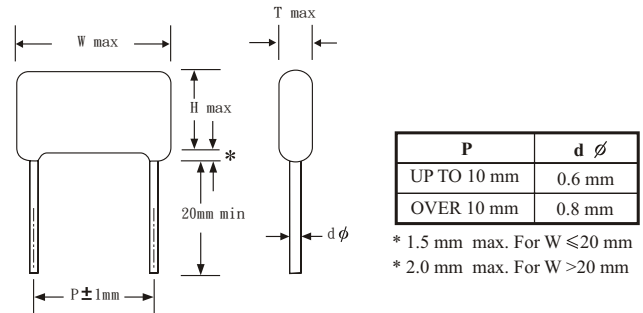


■外形图 Outline Drawing

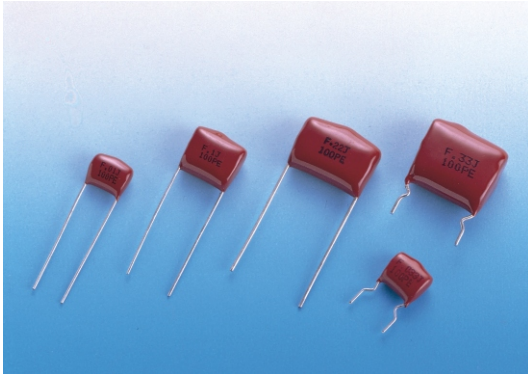

■ SPECIFICATION:

- OPERATING TEMPERATURE: -40 ~+85°C
- CAPACITANCE RANGE: .001~.47 μF
- CAPACITANCE TOLERANCE: ±5%, ±10%, ±20%
- RATED VOLTAGE: DC 50V/100V 250V 400V
- DISSIPATION FACTOR: 0.75% MAX AT 1KHz 25°C
- INSULATION RESISTANCE:  
> 50,000MΩ MIN AT 25°C
- DIELECTRIC STRENGTH:  
250% OF RATED VOL TAGE FOR 5 SEC

■ FEATURES:

- FOR GENERAL APPLICATIONS IN CONSUMER AND INDUSTRIAL ELECTRONIC EQUIPMENTS
- NON-INDUCTIVE CONSTRUCTION
- HIGH CONTACT RELIABILITY BETWEEN LEADS AND ELECTRODES

Unit:mm

SIZE μF	RV	50 VDC/100 VDC				250 VDC				400 VDC			
		W	H	T	P	W	H	T	P	W	H	T	P
0.001		10.5	9.0	5.5	7.0	10.5	9.0	6.0	7.0	13.5	9.0	5.0	10.0
0.0015		10.5	9.0	5.5	7.0	10.5	9.0	6.0	7.0	13.5	9.0	5.0	10.0
0.0022		10.5	9.0	5.5	7.0	10.5	9.0	6.0	7.0	13.5	9.0	5.5	10.0
0.0033		10.5	9.0	6.0	7.0	10.5	9.0	6.0	7.0	13.5	9.5	5.5	10.0
0.0047		10.5	9.0	6.0	7.0	10.5	9.0	6.0	7.0	13.5	10.0	6.0	10.0
0.0068		10.5	9.0	6.0	7.0	10.5	9.0	6.0	7.0	13.5	10.5	6.5	10.0
0.01		10.5	9.0	6.0	7.0	10.5	9.0	6.0	7.0	14.0	11.0	7.0	10.0
0.015		10.5	9.0	6.0	7.0	10.5	9.0	6.0	7.0	14.0	11.5	7.5	10.0
0.022		10.5	9.0	6.0	7.0	13.5	11.0	6.0	10.0	19.0	11.5	8.0	15.0
0.033		10.5	10.0	6.0	7.0	13.5	13.0	7.0	10.0	19.0	14.0	8.5	15.0
0.047		13.5	11.0	7.0	10.0	14.0	13.0	7.5	10.0	19.0	15.5	9.5	15.0
0.068		13.5	12.5	7.0	10.0	19.0	16.0	9.0	15.0	26.0	15.5	9.0	21.0
0.1		14.0	13.0	8.0	10.0	19.0	17.0	9.5	15.0	26.0	17.5	10.5	21.0
0.15		19.0	14.0	8.0	15.0	19.0	18.0	10.0	15.0				
0.22		19.0	16.0	8.5	15.0	26.0	21.0	10.5	21.0				
0.33		19.0	18.0	10.0	15.0	26.0	22.0	11.5	21.0				

注：以上所提供的性能参数仅供参考作用，任何修改不作预先通知。如果在使用上有疑问，请在采购前与我们联系，以便提供技术上的协助。

Note: The data contained in this brochure is only for your reference, any change or modification is made without previous notification. if any question in application, please feel free to contact us prior to purchase so that we provide further technical assistance.